


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.315	135.0
No. OF BOLTS		10	10.0
THREAD / THRO' HOLE		0.492	12.5
CROWN WHEEL SPIGOT DIA	D2	4.529	115.0
BEARING DIA	D3	1.8122	46.0
BEARING DISTANCE	L1	5.234	132.9
SPIGOT LENGTH	L2	0.710	18.0
	L2/A	0.710	18.0
OVERALL LENGTH	L3	6.654	169.0
BEARING/CROWN WHEEL	L4	1.435	36.4
BORE	D4	1.1824	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		27	
PITCH		24/48 D.P.	
TYPE		FLAT ROOT SIDE FIT	
PRESSURE ANGLE		30°	

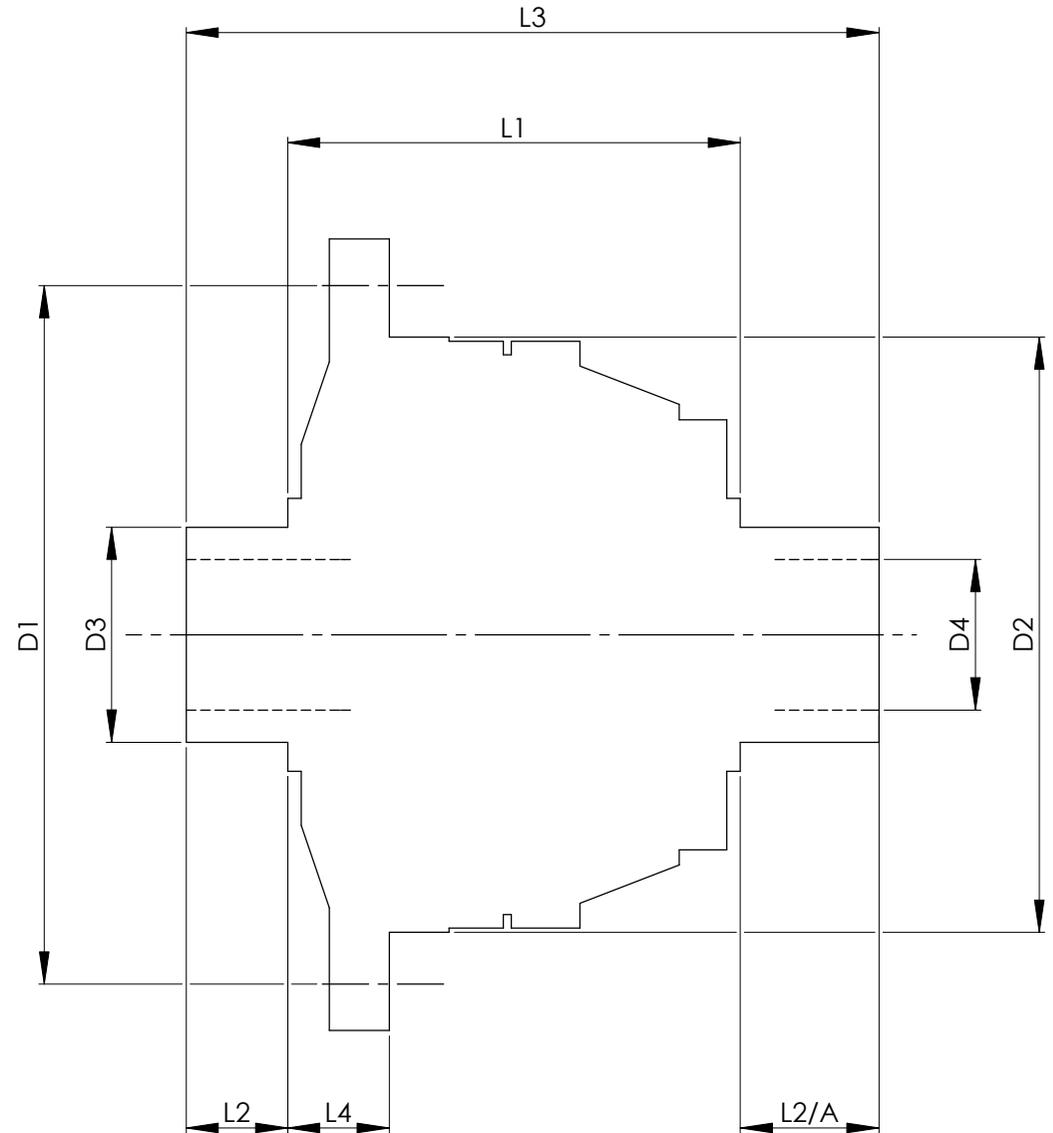

TITLE	DIFF. DATA SHEET
SCALE	1:1 U.O.S.
	SHEET 1 OF 1
Drg. No.	QDF13N

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIFF ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH.	MACH.	GRIND@G
LIMITS. FRACT.	± 1/64"	
	DEC. ± 0.005"	
MATERIAL.		
TREATMENT.		
ISSUE.	01	DATE. 6.3.07
DRAWN BY.	J.P.D.	
Used In.	BMW 130I/330 DIFF.	